




# Three Phase Hybrid Inverter

SUN- 6 / 8 / 10 / 12 / 15 / 20 K-SG01HP3-EU-AM2

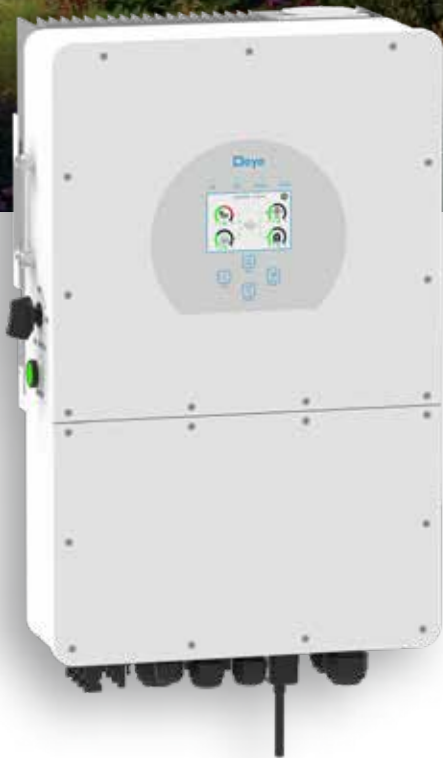

- 100** 100% unbalanced output, each phase; Max. output up to **50%** rated power
-  DC couple and AC couple to retrofit existing solar system
- 10** Max. 10pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 37** Max. charging/discharging current of 37A
- H** High voltage battery, higher efficiency
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

**Deye**

Stock Code: 605117.SH

Model	SUN-6K-SG01HP3 -EU-AM2	SUN-8K-SG01HP3 -EU-AM2	SUN-10K-SG01HP3 -EU-AM2	SUN-12K-SG01HP3 -EU-AM2	SUN-15K-SG01HP3 -EU-AM2	SUN-20K-SG01HP3 -EU-AM2
<b>Battery Input Data</b>						
Battery Type	Li-Ion					
Battery Voltage Range (V)	150~700					
Max. Charging Current (A)	37					
Max. Discharging Current (A)	37					
Number of battery input	1					
Charging Strategy for Li-Ion Battery	Self-adaption to BMS					
<b>PV String Input Data</b>						
Max. DC Input Power (W)	7800	10400	13000	15600	19500	26000
Max. DC Input Voltage (V)	1000					
Start-up Voltage (V)	150					
MPPT Range (V)	200-850					
Full Load DC Voltage Range (V)	195-850	260-850	325-850	340-850	423-850	500-850
Rated DC Input Voltage (V)	600					
PV Input Current (A)	20+20		26+20		26+26	
Max. PV I <sub>sc</sub> (A)	23+23		32+23		32+32	
No.of MPP Trackers	2					
No.of Strings per MPP Tracker	1		2+1		2	
<b>AC Output Data</b>						
Rated AC Output and UPS Power (W)	6000	8000	10000	12000	15000	20000
Max. AC Output Power (W)	6600	8800	11000	13200	16500	22000
AC Output Rated Current (A)	9.1	12.2	15.2	18.2	22.8	30.3
Max. AC Current (A)	13	18	22	25	30	35
Max. Continuous AC Passthrough (A)	80					
Peak Power (off grid)	1.5 time of rated power, 10 S					
Generator input/Smart load /AC couple current (A)	9.1 / 80 / 9.1	12.2 / 80 / 12.2	15.2 / 80 / 15.2	18.2 / 80 / 18.2	22.8 / 80 / 22.8	30.3 / 80 / 30.3
Power Factor	0.8 leading to 0.8 lagging					
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380, 230/400Vac					
Grid Type	Three Phase					
DC injection current (mA)	<0.5%1n					
<b>Efficiency</b>						
Max. Efficiency	97.60%					
Euro Efficiency	97.00%					
MPPT Efficiency	99.90%					
<b>Protection</b>						
Integrated	PV Input Lightning Protection, Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge protection					
Output Over Voltage Protection	DC Type II/AC Type III					
<b>Certifications and Standards</b>						
Grid Regulation	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
<b>General Data</b>						
Operating Temperature Range ( )	-40~60 , >45 derating					
Cooling	Smart cooling					
Noise (dB)	<45 dB					
Communication with BMS	RS485; CAN					
Weight (kg)	26					
Size (mm)	434W×645H×245D					
Protection Degree	IP65					
Installation Style	Wall-mounted					
Warranty	5 years					