

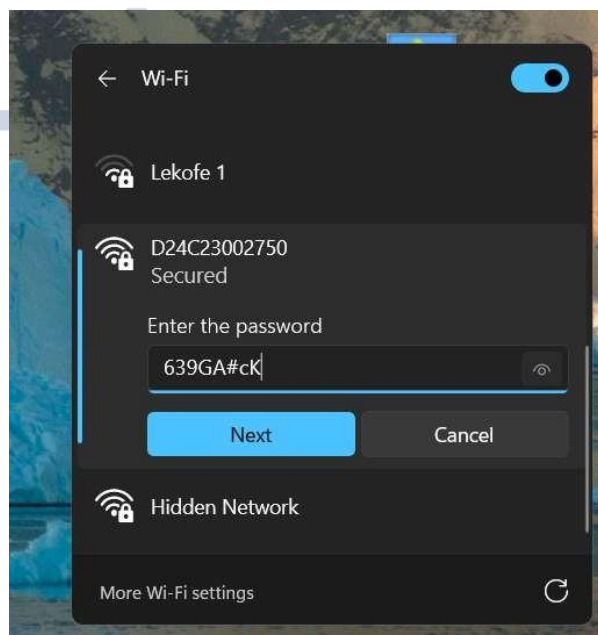



HƯỚNG DẪN UPDATE FIRMWARE INVERTER DEYE LOCAL

- B1: Kết nối WiFi phát ra từ logger (tên WiFi chính là SN logger), nhập mật khẩu WiFi (mật khẩu nằm trên tem logger, ghi chú là PWD)

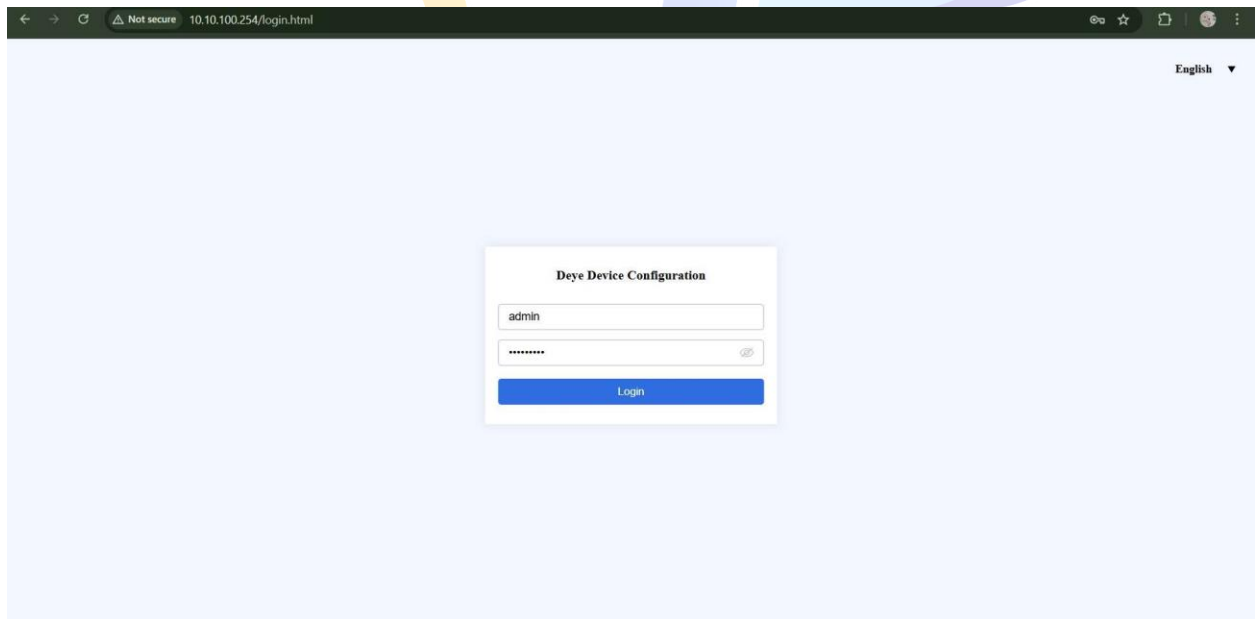

- B2: Truy cập IP 10.10.100.254 -> tiến hành đặt TK và MK. Trường hợp quên TK và MK, khách hàng ấn giữ nút reset đến khi đèn nhấp nháy thì thả ra, sau đó có thể cài đặt lại TK và MK.

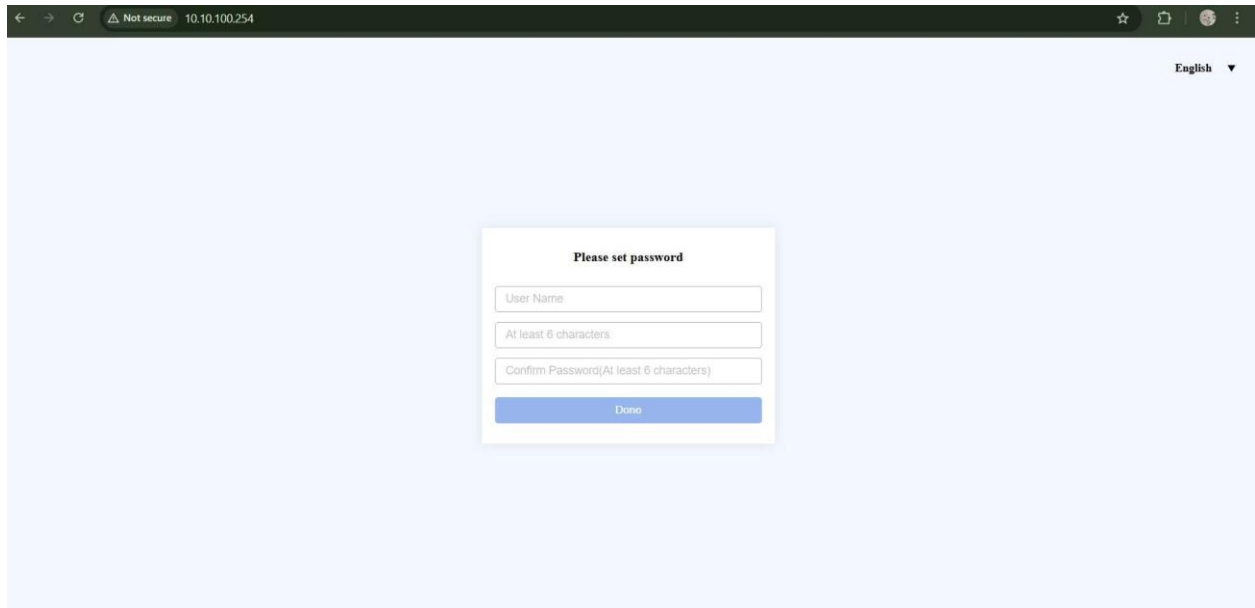

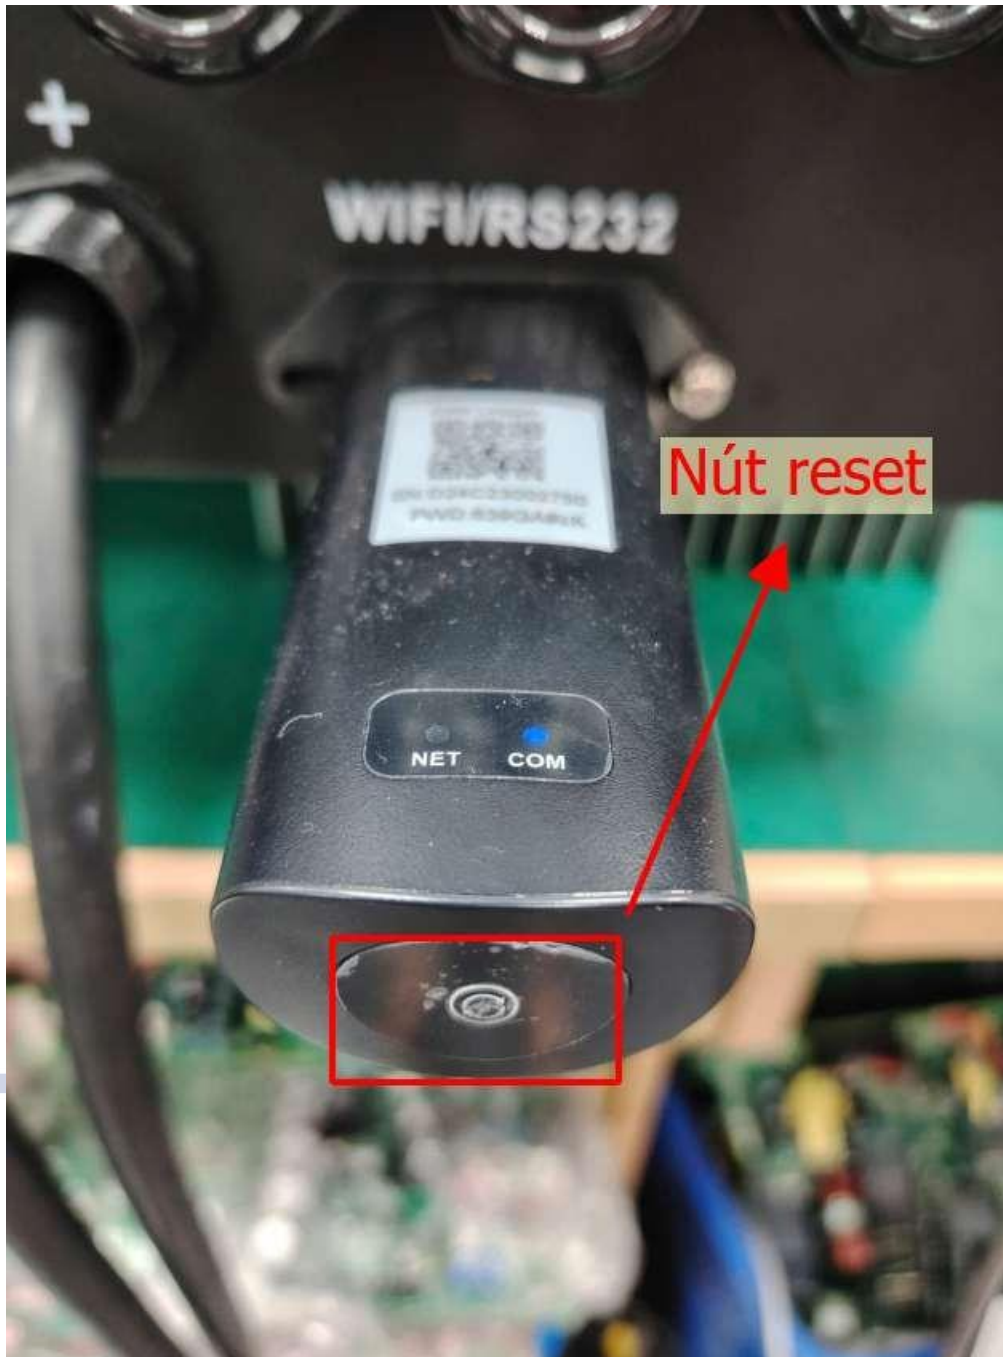

- B3: Trao giao điện chính chọn OTA -> Chọn Logger Firmware nếu update firmware cho Logger/Chọn Subdevice Firmware nếu update firmware cho inverter. -> Chọn "choose file" -> Chọn file firmware từ máy tính hoặc điện thoại -> Sau khi chọn file firmware -> "Chọn Start upgrading" -> Bằng xác nhận hiện ra, ta chọn OK.

- Device Status
- Wireless Settings
- Advanced Settings
- OTA

Logger Firmware Upgrade Subdevice Firmware Upgrade

Current Firmware Version: DYDA_WIBLE_1.3.0

file: choose file

Start upgrading

- Device Status
- Wireless Settings
- Advanced Settings
- OTA

Logger Firmware Upgrade Subdevice Firmware Upgrade

Current Firmware Version: C375

type: 1: Communication Board

file: 1: Communication Board
2: Control Board
3: Battery
4: Slave Control Board
5: Language

Start

Update LCD

Update control board

Update firmware BMS battery

← → ↻ Not secure 10.10.100.254/index.html

- Device Status
- Wireless Settings
- Advanced Settings
- OTA

Logger Firmware Upgrade

Current Firmware Version: 1: Communic

file: choose file

Start upgrading

Open




Firmware > LCD > LV1 Phase

Name	Date modified	Type	Size
MCU1-SG-Ver0000-C375-NEW6-CK.bin	25/02/2025 4:54 pm	BIN File	463
MCU1-SG-Ver0000-C372-CK.bin	26/02/2025 9:33 am	BIN File	459
MCU1-SG-Ver0000-C367-CK.bin	14/12/2023 2:10 pm	BIN File	446
MCU1-SG-Ver0000-C361-CK.bin	12/04/2024 9:39 am	BIN File	461
MCU1-SG-Ver0000-C36F-CK.bin	23/08/2024 9:17 am	BIN File	450
MCU1-SG-Ver0000-C3A6-CK.bin	18/03/2025 1:58 pm	BIN File	461



File name: MCU1-SG-Ver0000-C375-NEW6-CK.bin BIN File

Open Cancel



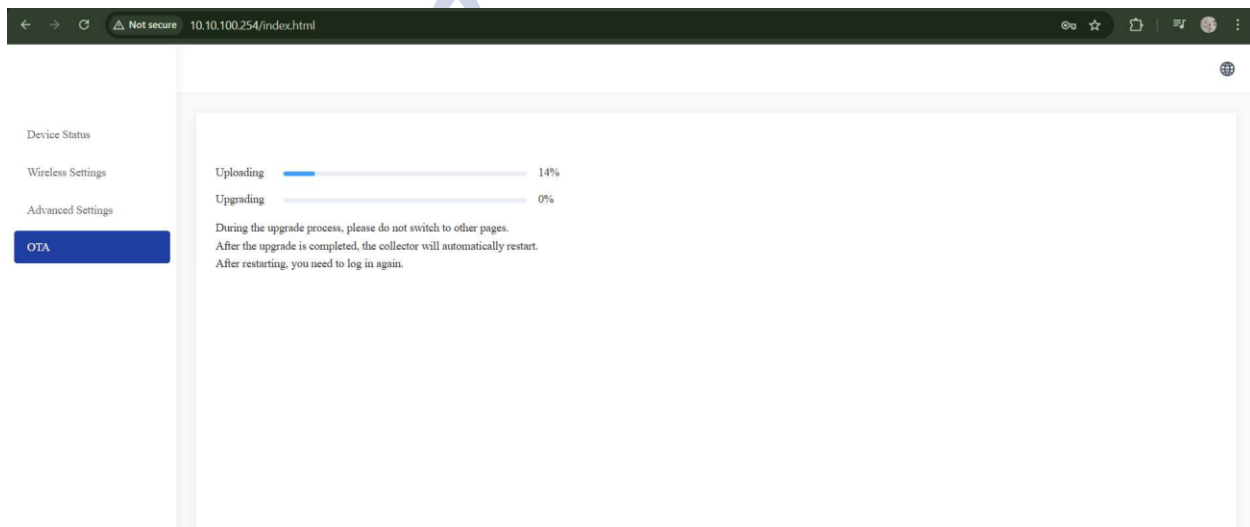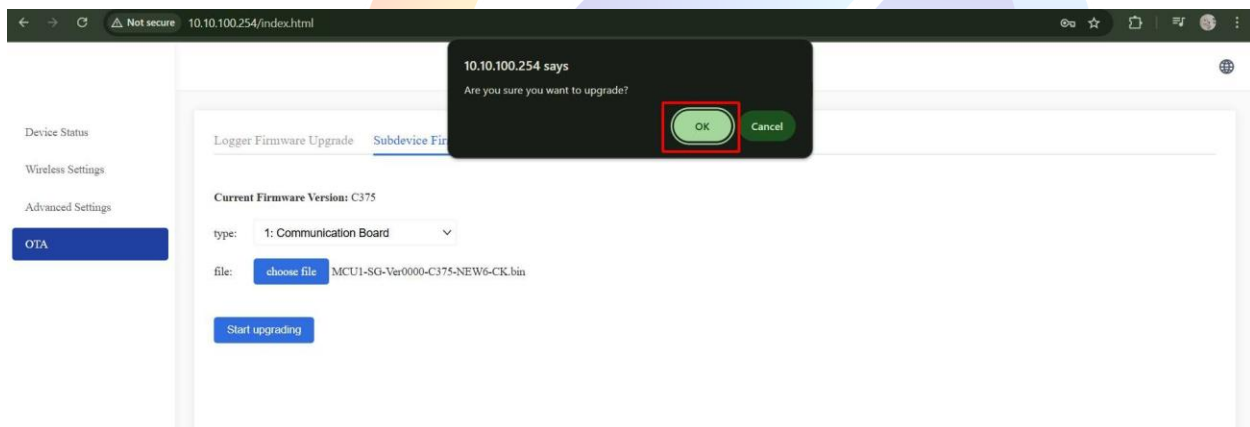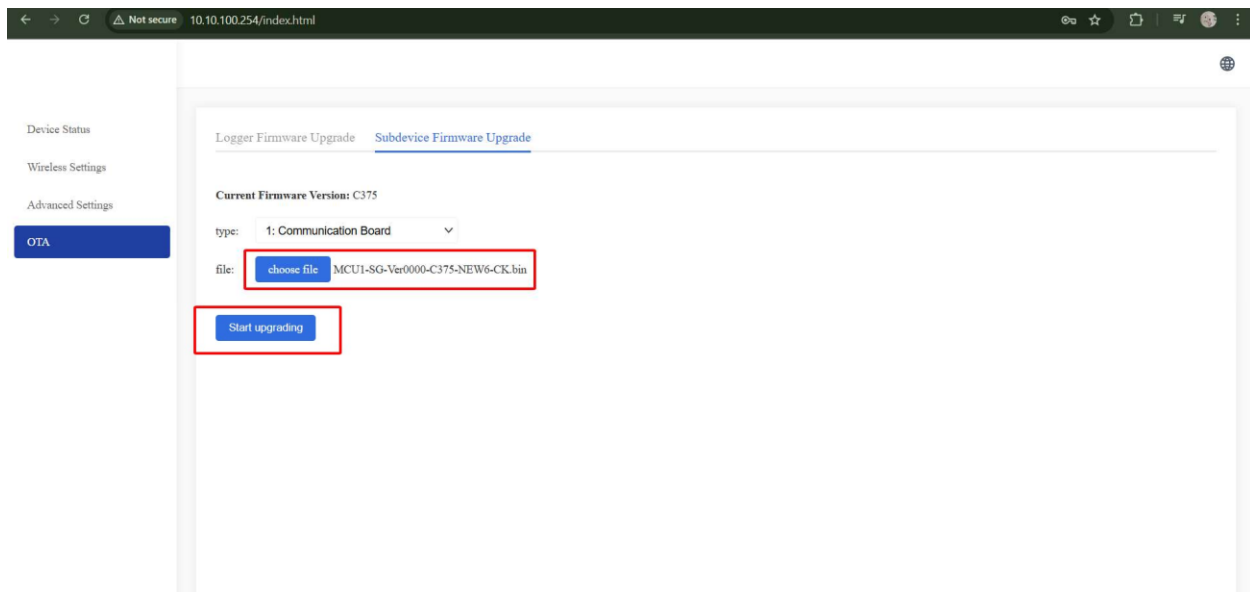

- B4: Đợi cho thanh updating và upgrading đạt 100% và kiểm tra firmware trên inverter có giống phiên bản đã update không.

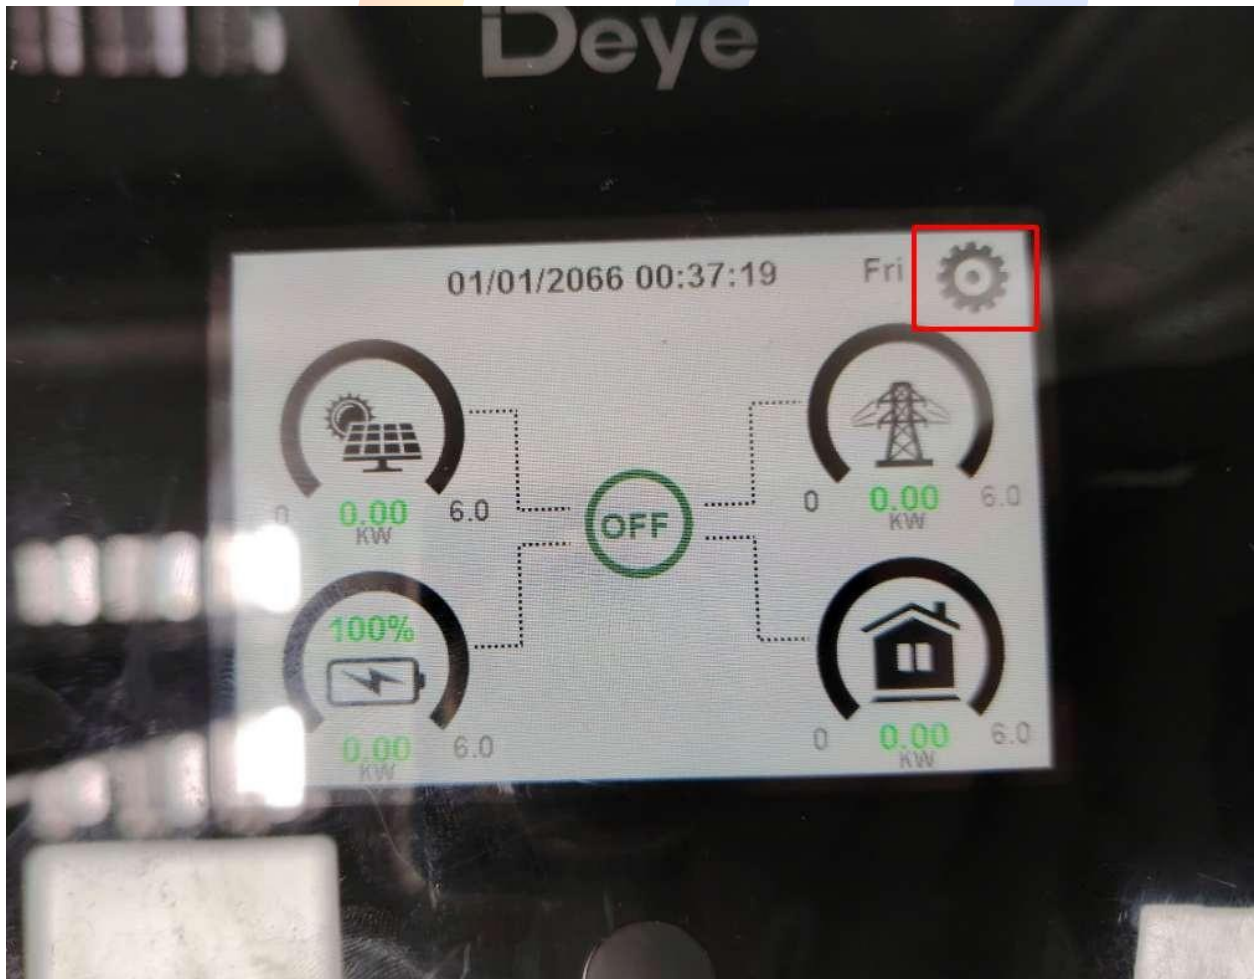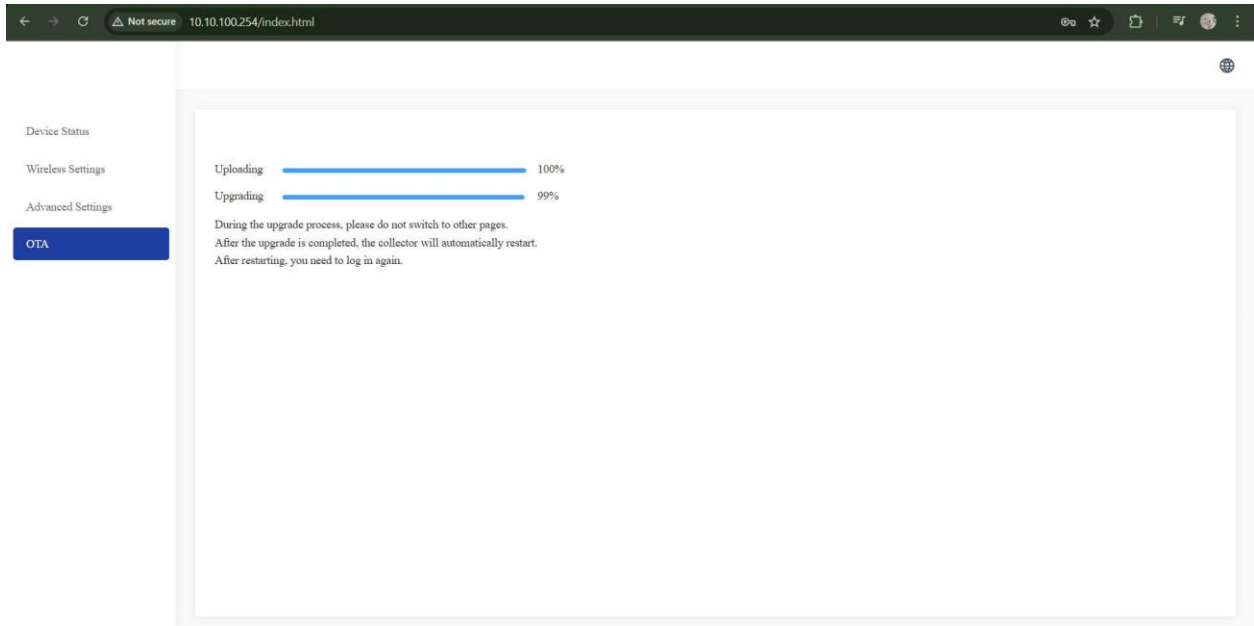



THUẬN PHONG
WE BUILD TOMORROW

Firmware version LCD

Control board
firmware version



THUẬN PHONG
WE BUILD TOMORROW